


## **Metal effect technique – Cambiato**

Metalleffekttechnik Cambiato

with **Creativ Metallico 76**, a slightly textured, metallic iridescent surface with fine-molded character – slight brush effect

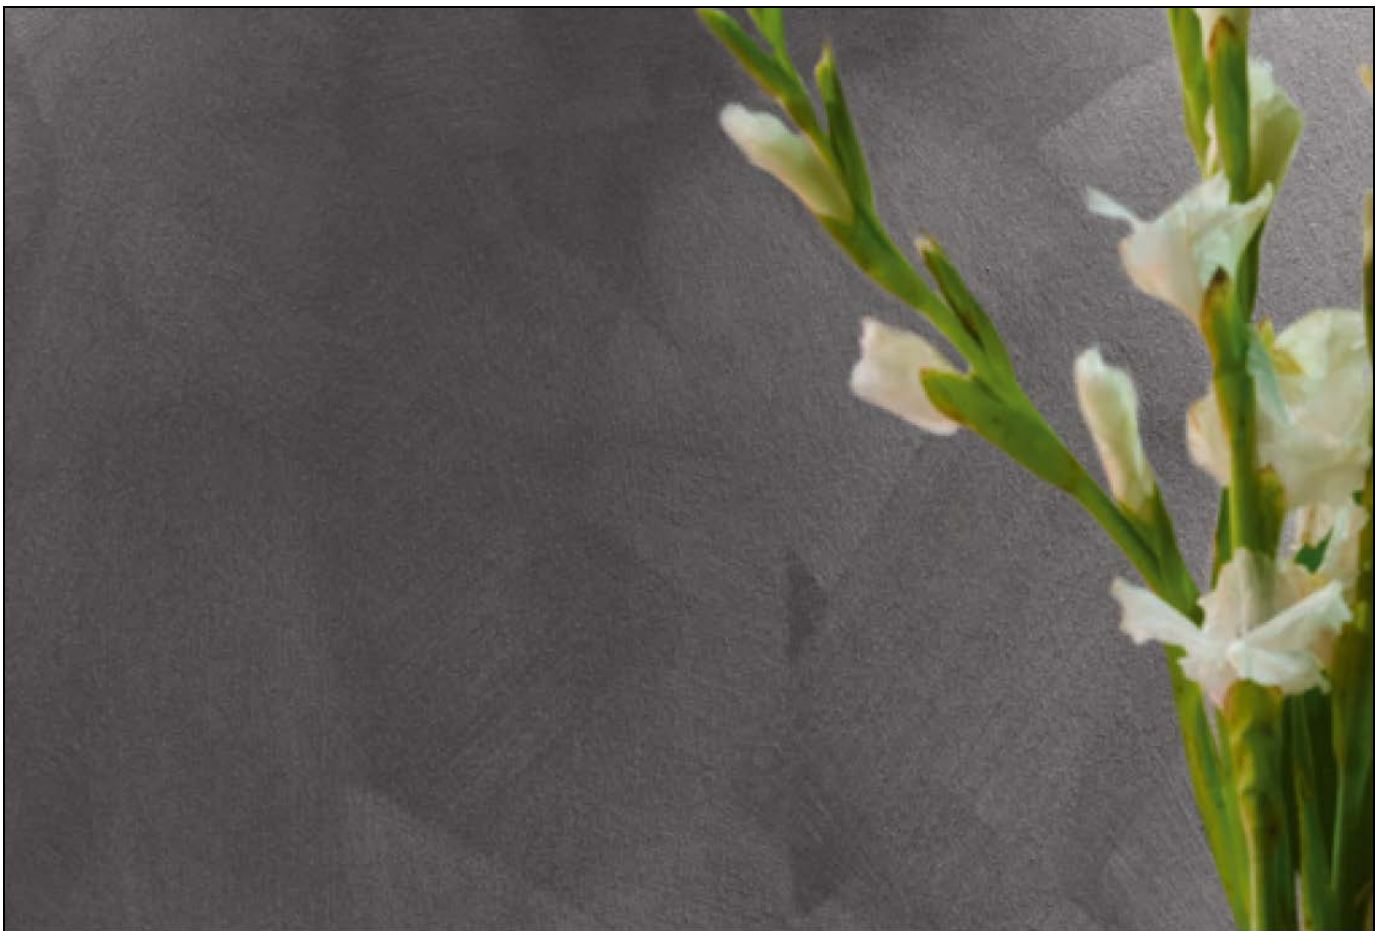

The figure shows a variant of the creative technique and should convey an impression of the surface effect to be achieved. There is no guarantee that the exact color will be reproduced.

**Substrate:** smoothly filled and primed

**Prime coat:** Super Latex ELF 3000, color shade Scala 69.03.27

**1<sup>st</sup> Decorating step:** Creativ Metallico 76, color shade 7678/10

**2<sup>nd</sup> Decorating step:** Creativ Metallico 76, color shade 7678/10

**Overcoat:** Creativ Classico 50, colorless, base 100

## Characteristics

Modern design technique with a special, colored metal-effect look. The effect filler material is applied to the entire surface with a roller on a colored, smooth substrate and then distribute by crisscrossing in short strokes using a Deco Wiper 1192 or Flat Surface Brush 1210. This creates a slightly rough surface with a metallic effect. The slightly textured surface also livens up the metallic effect and gives the design a special touch.

## Field of application

For high-quality, individual designs on interior walls and ceilings. Especially suitable for visual emphasis of wall mirrors, decorative band, columns, etc.

## Application

### Substrate condition

#### Smooth

The substrate must be stable, dry, clean, load-bearing, pore-free and smoothly filled using, e.g., a Mineral Hand-Applying Filler 1886. Prime the sanded, dust-free surfaces with Lacryl Deep Penetrating Primer ELF 595.

#### Fine textured

The surface, e.g. CreaGlas fabric or brush-on plaster, must be stable, dry, clean and load-bearing and prepared for the creative technique to be applied afterwards.

### Prime coat

Use a Microfiber Paint Roller 1221 to apply a uniformly covering coating without texture of Super Latex ELF 3000 or Dolomit ELF 900, color matched to the coating with Creativ Metallico 76 (for available colors, see color chart Creativ Metallico 76). Sand the surfaces after drying with, for example, Festool Rotex RO 150 E-Plus 3247 with an extraction unit, 180-grit and remove sanding dust.

### 1<sup>st</sup> Decorating step

Use a Microfiber Paint Roller 1221 to apply a uniform, medium coat of Creativ Metallico 76 on the carefully prepared surface. Distribute and smooth uniformly by crisscrossing the wet coat film immediately afterwards using the paint roller.

After a short flash-off time (about 5 to 10 minutes on a surface of normal absorbency), crisscross the surface in short strokes and with slight pressure using a Deco Wiper 1192 or Surface Block Brush Extra 1210.

Always apply and texture from the top downwards without leaving any gaps.

### 2<sup>nd</sup> Decorating step

Once the first coat has dried apply the second coat and distribute it uniformly as described in the first decorating step.

### Overcoat - optional

After drying for at least 12 hours use a Microfiber Paint Roller 1221 to apply a uniform, thin overcoat of Creativ Classico 50, colorless, basis 100, glossy.

## Notes

### Dilute on textured substrate

When used on textured surfaces, dilute Creativ Metallico 76 with 10% water and apply and smooth as previously described.

### Masking tapes

Masking tapes should only be applied directly before each decorating step and removed again immediately after the work is finished.

### Work in diagonal strips

Apply Creativ Metallico 76 during each decorating step in narrow, slightly diagonal strips with uneven margins. Keep to a strip width of approx. 0.50 m for a room height of approx. 2.50 m. The individual strips should be cloudy where they overlap in order to avoid forming a pattern of straight strips.

### Replacing the tool

During intensive reworking with a Deco Wiper 1192 or Flat Surface Brush 1210, replace the tool as often as required.

**Perform the decorating steps properly**

Texture quickly and only once. Repeatedly working the surfaces causes significant negative changes in the surface. Reworking the surface too early with the Deco Wiper 1192 or Surface Block Brush Extra 1210 will leave clearly pronounced brushed texture. A non-uniform application of material will result in a very coarse, wavy, uneven surface.

**Adjacent surfaces**

The decorator should change his position continuously in order to obtain a harmonized uniform surface appearance without unwanted patterns. With large surfaces the work steps should be performed by two decorators working together. When working with Creativ Metallico 76 on visual contiguous surfaces, only one person should perform the several work steps because each decorator has a unique personal style.

**Assessing the test areas**

The description of how this technique is performed is a tried-and-tested standard method which can be modified and expanded according to the user's own creativity. The general appearance of a creative technique is determined by the color choice and combination, how the technique in question is performed and by the decorator's individual style. We recommend preparing test surfaces to get an impression of how the surface will look.

**Further specifications**

For further product information, see the information on the data sheets of the other products used.

**Remark**

This information is the result of many years of practical experience. The content of this data sheet does not constitute a contractual legal relationship. All information has been translated from the German version. The person using our paints is responsible for checking our products with regard to their suitability for the intended application. In addition, our General Terms of Business apply.

When a new version of this Data Sheet appears with updated information the previous version no longer applies.

Brillux  
Weseler Straße 401  
48163 Münster  
GERMANY  
Phone +49 251 7188-0  
Fax +49 251 7188-105  
info@brillux.de  
www.brillux.com

**List of materials and tools****Metal effect technique – Cambiato with Creativ Metallico 76****• Smoothing the substrate (on smooth substrates)**

<b>Material/Tool</b>	<b>Consumption</b>
Mineral Hand Applying Light Filler 1886	approx. 1,0 l/m <sup>2</sup>
Lacryl Deep Penetrating Primer ELF 595	approx. 150–200 ml/m <sup>2</sup>

**• Prime coat**

Super Latex ELF 3000	approx. 120–140 ml/m <sup>2</sup>
Microfiber Paint Roller 1221	
StickFix Brilliant Sanding Disks 150 mm, 3243	approx. 1 piece/m <sup>2</sup>

**• 1<sup>st</sup> Decorating step**

Creativ Metallico 76	approx. 130–150 ml/m <sup>2</sup>
Microfiber Paint Roller 1221	
Deco Wiper 1192	
Surface Block Brush Extra 1210	

**• 2<sup>nd</sup> Decorating step**

Creativ Metallico 76	approx. 130–150 ml/m <sup>2</sup>
Microfiber Paint Roller 1221	
Deco Wiper 1192	
Surface Block Brush Extra 1210	

**• Overcoat (optional)**

Creativ Classico 50, colorless, basis 100	approx. 120 ml/m <sup>2</sup>
Microfiber Paint Roller 1221	